




Splitters (FG_Series)

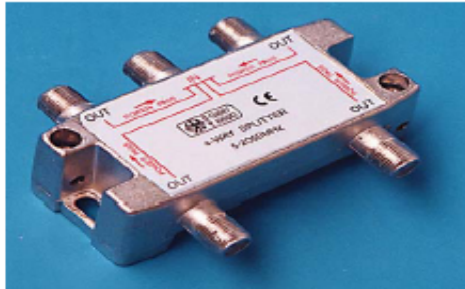

Features:

- ❶ High screening factor (corresponds to DIN V VDE 0855 /Part 10 and 1 R 8-15).
- ❷ Decoupling by transformer.
- ❸ Frequency range from 40 to 2050 MHz.
- ❹ Remote power pass for LNC or line amplifier.

Specifications

| Mode | Number of Output | Frequency range (MHz) | Distribution Loss (dB) | Isolation between output(dB) | Return loss (dB) | Connector F- SOCKETS WITH EXTERNAL | Screening factor (dB) | impedance (Ohm) | Dimension (mm) |
|------|------------------|-----------------------|------------------------|------------------------------|------------------|------------------------------------|-----------------------|-----------------|----------------|
| 2FG | 2 | 40-2050 | 5 | >20 | >12 | thread 3/8" | >75 to 470MHz | 75 | 55x35x26 |
| 4FG | 4 | 40-2050 | 9 | >20 | >12 | -32THD | >65 from 470Ml | 75 | 77x35x26 |